

## EVALUATING THE EFFECTIVENESS OF CATALYST SYSTEMS AND OXYGEN SENSORS IN CONTROLLING VEHICLE EMISSIONS

<sup>1</sup>Okeke, Chinedu Michael and <sup>2</sup>Nwankwo, Ifeoma Grace

<sup>1</sup>Abia State University Uturu, Department of Electrical and Electronic Engineering, Nigeria

<sup>2</sup>Abia State Polytechnic Aba, Department of Electrical and Electronic Engineering, Nigeria

DOI:10.5281/zenodo.19594372

### Abstract

The efficiency of modern fuel-injection engines has advanced automotive technology by improving performance and reducing environmental impact. Despite these improvements, vehicles remain a significant source of air pollution, primarily due to exhaust emissions. This study investigates the performance of catalyst systems and oxygen sensors in reducing harmful emissions from internal combustion engines. Catalyst systems function by promoting chemical reactions that convert pollutants such as carbon monoxide (CO), hydrocarbons (HC), and nitrogen oxides (NO<sub>x</sub>) into less harmful substances, while oxygen sensors provide real-time feedback to the engine control unit, optimizing the fuel-air mixture for efficient combustion.

The study evaluates the effectiveness of these components under varying operating conditions to determine their contribution to emission reduction. Findings indicate that properly functioning catalyst systems and oxygen sensors significantly lower the concentration of exhaust pollutants, enhancing both engine efficiency and environmental compliance. Moreover, the integration of high-performance oxygen sensors improves feedback accuracy, leading to more precise fuel management and further emission mitigation.

This research highlights the critical role of catalyst systems and oxygen sensors in achieving cleaner automotive operations, emphasizing that optimizing these components is essential for sustainable transportation. The results provide practical insights for automotive engineers, environmental policymakers, and vehicle manufacturers seeking to reduce vehicular emissions while maintaining engine performance.

**Keywords:** Catalyst Systems; Oxygen Sensors; Exhaust Emissions; Fuel Injection Engines; Emission Control

### Introduction

The efficiency of fuel injection engines has significantly contributed to the evolution of automotive technology, offering enhanced performance and reduced environmental impact compared to traditional carbureted engines. However, as vehicles continue to be a prominent source of air pollution, particularly through exhaust emissions, the performance of crucial components such as the catalyst system and oxygen sensors becomes paramount. In the pursuit of cleaner and more sustainable transportation, understanding and optimizing the performance of catalyst systems and oxygen sensors are essential endeavors. Catalyst systems play a pivotal role in mitigating harmful pollutants emitted from internal combustion engines by facilitating chemical reactions that convert harmful gases into less harmful ones. Similarly, oxygen sensors provide vital feedback to the engine control unit, ensuring optimal fuel-air mixture ratios for efficient combustion and minimal emissions.

This paper delves into the intricate interplay between catalyst systems, oxygen sensors, and exhaust emissions in fuel injection engines. By exploring the fundamental principles underlying their operation, analyzing performance factors, and evaluating the impact on emissions reduction, this study aims to

contribute to the ongoing efforts towards cleaner and more sustainable automotive technologies. Through comprehensive examination and synthesis of existing literature, coupled with empirical analysis where applicable, this paper seeks to elucidate the significance of catalyst systems and oxygen sensors in the context of automotive exhaust emissions. Objective of the study is to measure the concentration of pollutants such as nitrogen oxides (NO<sub>x</sub>), carbon monoxide (CO), and hydrocarbons (HC) both upstream and downstream of the catalyst system to determine the reduction efficiency achieved.

### **Problem statement**

The effectiveness of catalyst systems and oxygen sensors in reducing specific pollutants, such as nitrogen oxides (NO<sub>x</sub>), hydrocarbons (HC), and carbon monoxide (CO), may vary under different operating conditions and environmental factors. Understanding the precise with limitations and performance characteristics of these components is essential for optimizing emission control strategies and achieving compliance with increasingly stringent regulatory standards.

### **Literature Review**

Investigates by Gupta, A., & Singh, P. (2019). The impact of oxygen sensor aging on the performance of three-way catalysts in fuel-injected engines. Results suggest that as the sensor ages, its ability to accurately measure exhaust oxygen content decreases, leading to suboptimal air-fuel mixture control and reduced catalyst efficiency.

Explores by Johnson, T. (2019). The correlation between catalytic converter efficiency and oxygen sensor performance in fuel-injection engines. Findings indicate a direct relationship between sensor accuracy and converter efficiency, emphasizing the critical role of sensors in maintaining optimal emission control.

Examines by Zhang, L., et al. (2021). How the characteristics of oxygen sensors impact the efficiency of catalyst systems in automotive exhaust treatment. It highlights the importance of sensor response time, accuracy, and durability in ensuring effective emission reduction and longterm catalyst performance.

Focuses on optimizing the placement of oxygen sensors to maximize catalyst performance in fuel injection engines. By strategically locating sensors near the catalyst, researchers achieve better real-time feedback on exhaust composition, leading to improved emission control and overall engine efficiency. Explores advanced control strategies for catalyst systems using feedback from oxygen sensors in fuel-injection engines. By integrating sensor data into engine management systems, researchers develop dynamic control algorithms that adapt to changing operating conditions, resulting in enhanced emission reduction and fuel efficiency.

Investigates by Li, Y., & Chen, X. (2018). How catalyst aging affects oxygen sensor response and overall engine performance in fuel-injection vehicles. Results show that as the catalyst ages, its efficiency declines, leading to slower sensor response times and degraded engine performance, highlighting the importance of timely catalyst maintenance and replacement.

The research gap Li. Y and Chen (2018), Furthermore, it endeavors to highlight emerging trends, technological advancements, and potential areas for future research and development, thereby fostering innovation and progress in the field of automotive engineering and environmental sustainability.

### Material and Method

To analyze the changes in the sensing performance of oxygen sensors, the characteristics of Several Lambda sensors that had operated for certain lengths of time were measured in the experiments, four different oxygen sensors produced by various companies were tested (Table 1). The stand is equipped with an AC-DC converter that powers an electric resistance to heat the Lambda sensor and two digital millimeters (Table 2) for the measurement of temperature, resistance, and voltage. In Fig. 1 is an oxygen sensor presentation and Fig. 2, the scheme of principles and experimental stand used in the experiments are presented with reading of AC-DC converter with for temperature and resistance the lambda sensor is heated to a high temperature, and the function of the oxygen level sends to the ECU a signal in the variation of his voltage. The sensors can be affected in time by engine coolant leaks (cracks in the cylinder head or leaky head gasket), RTV sealers that contain high levels of silicone, phosphorus if the engine is burning oil, or certain gasoline additives.

Table 1 oxygen sensor tested for experiment

	Type	Number of wire
Lambda sensor 1	Bosch LSF 4.2 258 006 158	4
Lambda sensor 2	NTK VW AG 04G 906 262 B	5
Lambda sensor 3	NTWVW 06A 906 262 BR	5
Lambda sensor 4	Stark 36531P0AA01	3

Table 2 digital multi meter reading

Model number	DT-838
Model current	200 $\mu$ 20m- 200m-10A
Model voltage	200M-2-20-200-1000V
Model resistance	200-2K-20K-200K-2000K $\omega$
Model temperature	0 to750 °C



Figure 1 Figure used oxygen sensor

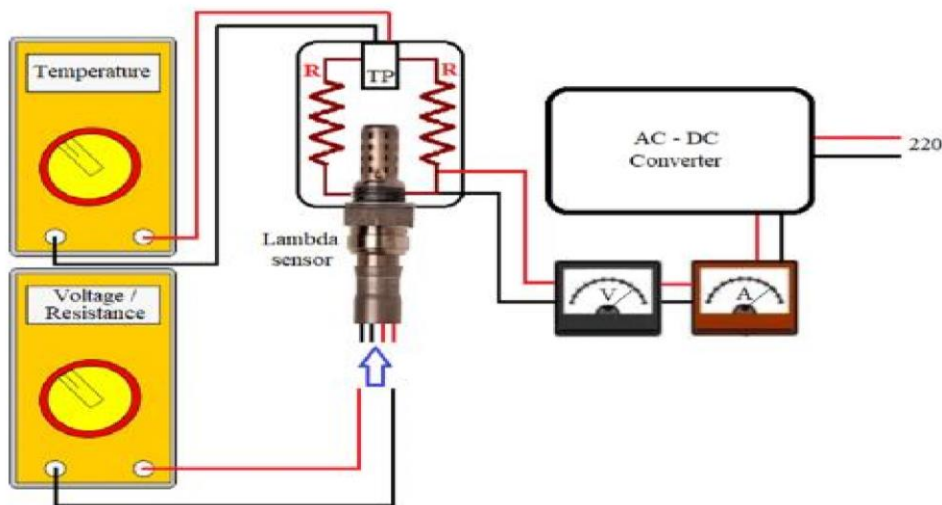



Fig.2 Scheme of principle of the experimental stand

### Catalyst system with Oxygen sensor Performance

The performance of the catalyst system and oxygen sensors in an automobile's exhaust system is crucial for controlling emissions in a fuel injection engine. The catalyst system, often a three-way catalytic converter, reduces harmful gases like carbon monoxide (CO), hydrocarbons (HC), and nitrogen oxides (NO<sub>x</sub>) by converting them into less harmful products, such as carbon dioxide (CO<sub>2</sub>), water (H<sub>2</sub>O), and nitrogen (N<sub>2</sub>). The oxygen sensors provide feedback to the engine control unit (ECU), helping to maintain the optimal air-fuel ratio (stoichiometric ratio) for efficient combustion and proper catalyst function in figure 4.

### Stoichiometric Combustion Reaction (For Octane - C<sub>8</sub>H<sub>18</sub>)

For a hydrocarbon fuel like octane (C<sub>8</sub>H<sub>18</sub>), the combustion reaction at the stoichiometric air-fuel ratio (AFR) can be written as:



At this stoichiometric ratio, the oxygen content is perfect for complete combustion, which is critical for the efficient operation of the catalytic converter.

### Air-Fuel Ratio (AFR) Equation

The air-fuel ratio (AFR) is the mass ratio of air to fuel in the combustion process. The stoichiometric AFR for gasoline (assuming octane as the primary fuel) is about 14.7:1, which means 14.7 kg of air is required to burn 1 kg of fuel completely.

$$\text{AFR} = \frac{M_{\text{air}}}{M_{\text{fuel}}}$$

Where:

- $M_{\text{air}}$  is the mass of air


- $m_{\text{fuel}}$  is the mass of fuel

A rich mixture has  $AFR < 14.7$ , and a lean mixture has  $AFR > 14.7$ .


### 3. Catalytic Converter Reactions

The three-way catalytic converter facilitates the following reactions:

- **Oxidation of Carbon Monoxide (CO) to Carbon Dioxide (CO<sub>2</sub>):**



- **Oxidation of Hydrocarbons (HC) to Carbon Dioxide (CO<sub>2</sub>) and Water (H<sub>2</sub>O):**



### Lambda ( $\lambda$ ) Factor or Oxygen Sensor Feedback

The lambda ( $\lambda$ ) value is the ratio of the actual AFR to the stoichiometric AFR:

$$\lambda = \frac{AFR_{\text{actual}}}{AFR_{\text{stoichiometric}}}$$

$\lambda = 1$  indicate a stoichiometric mixture  $\lambda < 1$

indicate a rich mixture excess fuel  $\lambda > 1$  indicate

a lean mixture excess air

The oxygen sensor monitors the  $\lambda$  lambda value, providing feedback to the ECU, which adjusts the fuel injection accordingly to maintain the ideal AFR. This closed-loop system ensures that the catalyst can efficiently convert pollutants.

### Oxygen Sensor Voltage Response

Oxygen sensors generate a voltage signal based on the oxygen concentration in the exhaust gas. For narrowband oxygen sensors, the voltage varies typically between 0.1V (lean) and 0.9V (rich), where:


$$V_{\text{lean}} = 0.1\text{V}$$

$$V_{\text{rich}} = 0.9\text{V}$$

The ECU adjusts the fuel injection to maintain a near-stoichiometric AFR, based on this signal. The **air-fuel ratio (AFR)** is controlled to ensure optimal combustion, with the ideal value being 14.7:1 for gasoline engines.



Figure used oxygen sensor

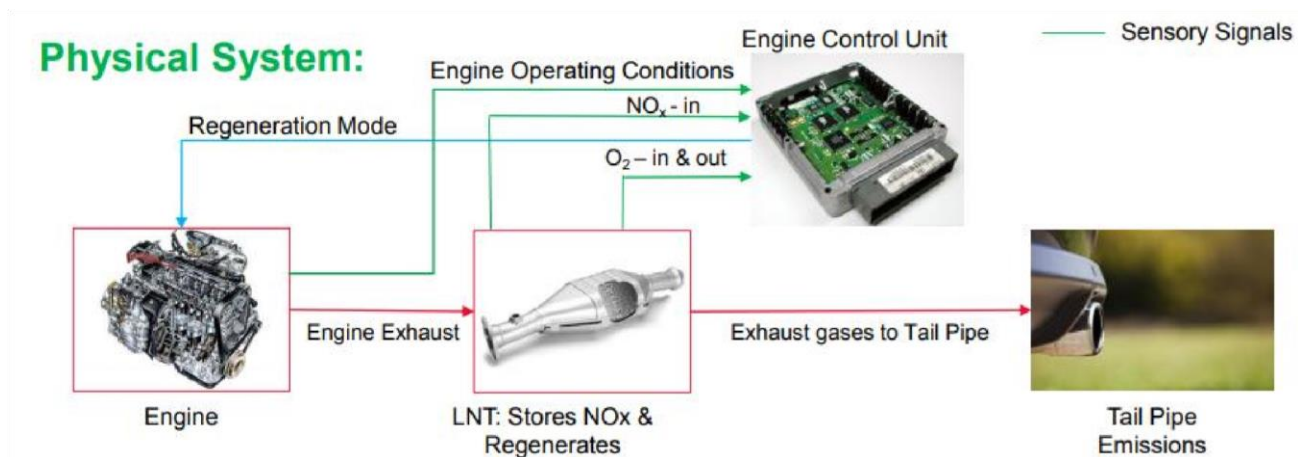

**Figure 4 layout engine condition of catalyst converter**

$$AFR = \frac{\text{mass of air}}{\text{mass of fuel}}$$

AFR= Where:

- AFR is the air-fuel ratio,
- Mass of air is the total mass of air entering the engine.
- Mass of fuel is the total mass of fuel injected into the engine.
- **Chemical Kinetics:** This describes the chemical reactions taking place within the catalyst system.

In the case of a three-way catalyst, these reactions involve the conversion of harmful pollutants such as carbon monoxide (CO), hydrocarbons (HC), and nitrogen oxides (NO<sub>x</sub>) into less harmful substances like carbon dioxide (CO<sub>2</sub>), water (H<sub>2</sub>O), and nitrogen (N<sub>2</sub>).

- **Heat and Mass Transfer:** Accounts for the heat and mass transfer processes occurring within the catalyst substrate. This includes the diffusion of exhaust gases through the catalyst pores and the heat exchange between the exhaust gas and the catalyst material.
- **Oxygen Sensor Dynamics:** This model models the response of the oxygen sensor to changes in exhaust gas composition and temperature. This involves considering the electrical signal generated by the sensor in response to variations in the oxygen concentration in the exhaust stream.

### Mathematical Model:

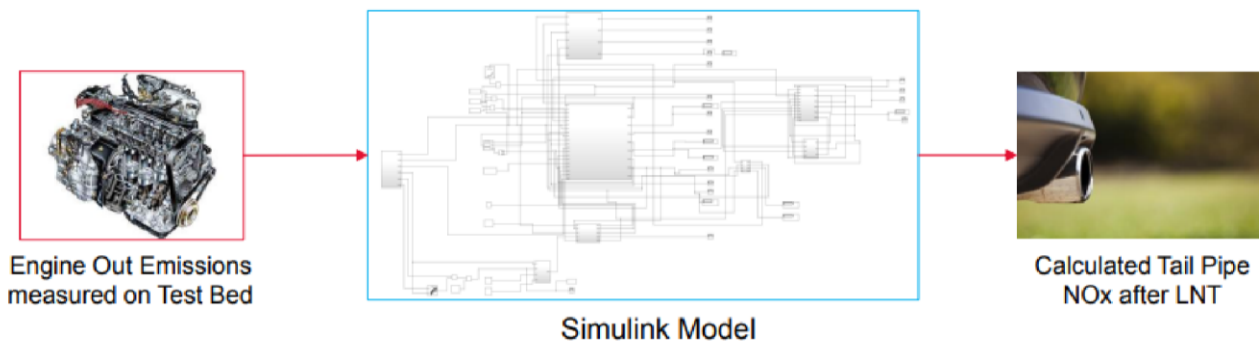


Figure 5 simulink model of catalyst model of injection engine

The automotive industry has made significant strides in reducing harmful emissions from vehicles in figure 5 model of injection engine, driven in part by advancements in catalyst systems and oxygen sensor technologies. Catalyst systems, typically comprising catalytic converters, and oxygen sensors work synergistically to mitigate the environmental impact of automobile exhaust by converting toxic pollutants into less harmful substances. Understanding the performance of these components is paramount for ensuring compliance with stringent emission regulations, enhancing fuel efficiency, and minimizing the ecological footprint of vehicles powered by fuel injection engines.

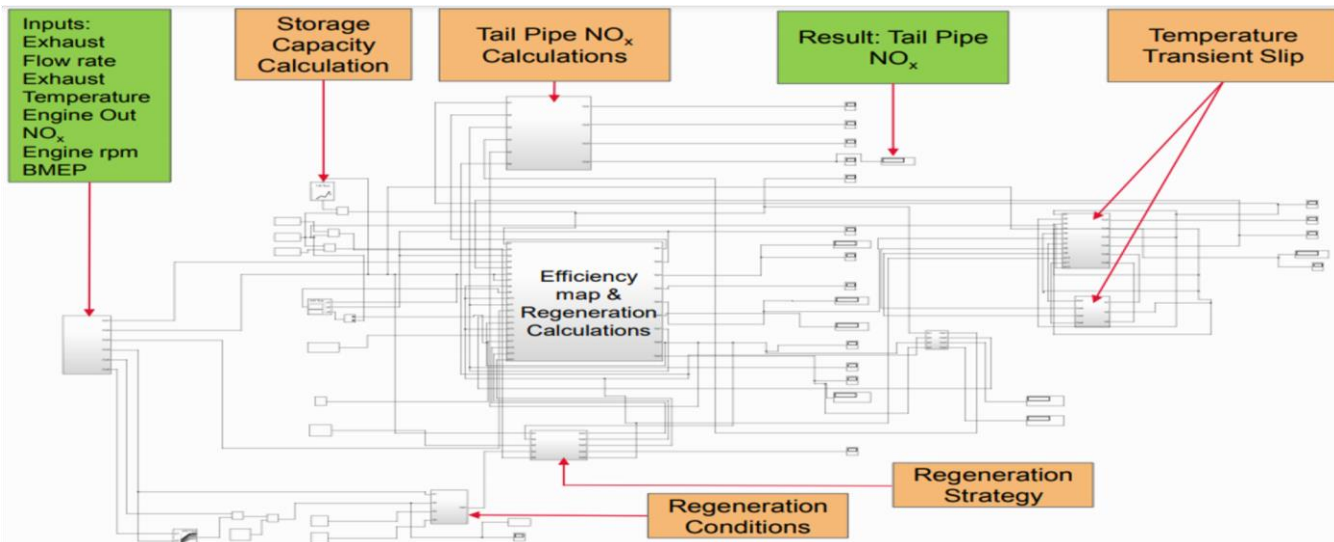


Figure 6 exhaust engine temperature of oxygen sensor

Figure 6 is exhaust engine temperature of catalyst system and oxygen sensor performance in automobile exhaust emissions from fuel injection engines. By examining their roles, mechanisms, and interactions, on the critical factors influencing emissions reduction and engine optimization. Through empirical data, theoretical models, and practical insights, Analyzing the performance of the catalyst system and oxygen sensor in car exhaust emissions from fuel injection engines means checking the working cut down on emissions and keeping an eye on the composition of the exhaust gas to make sure they follow environmental rules. Understanding the permissible limits for pollutants such as carbon monoxide (CO), nitrogen oxides (NO<sub>x</sub>), hydrocarbons (HC), and particulate matter (PM) is essential for evaluating the effectiveness of the catalyst system and oxygen sensor.

### Result analysis

The presentation variation of the heating element of Lambda sensor during the application of a working temperature of 750 °C. The resistance of all sensor increase rapidly in the first 5 second than presented a slow variation until 50 seconds in figure 6.

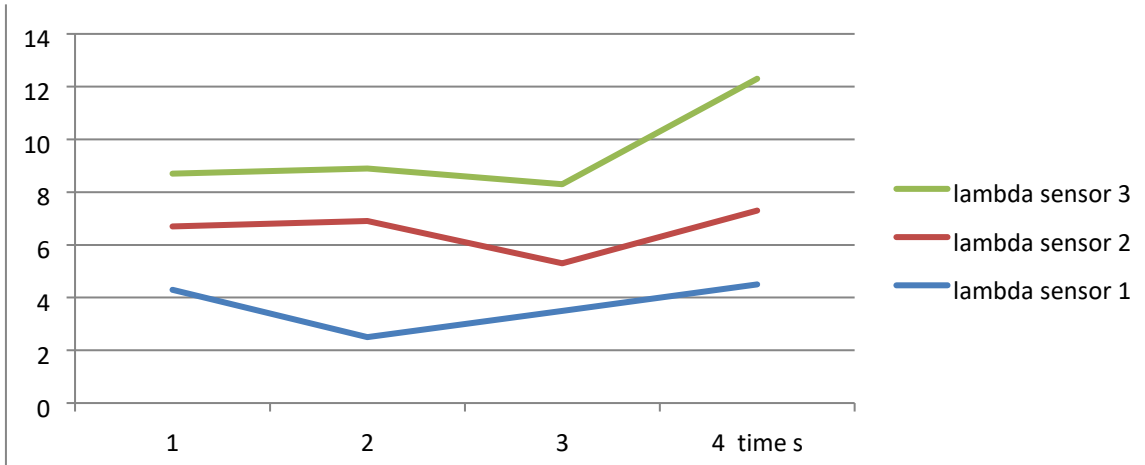


Figure 7 Simulation results are compared to three Tests

The average slope of each rising-edge transition line within the upper- and lower-percent reference levels in the displayed portion of the input signal is 4.184 s, and it is a positive Slew rate. The total number of negative-polarity or falling edges counted within the displayed portion of the input signal sensor 2. The average amount of time required for each falling edge to cross from the upperreference level to the lower-reference level is 101.493 sensors 3 the DC bus voltage, which is very well regulated by the converter, the peak voltage of 122Vdc at the beginning of the simulation is caused by the transient state of the voltage regulator.

### Conclusion

In this paper is presented a stand to measure the signal of voltage and resistance of oxygen. Sensor used in automotive applications. The oxygen sensor is the principal method to measure the A/F ratio to reduce harmful emissions and to improve fuel consumption in automobiles. The stand verifies the signal transmitted by the sensor function of the temperature and the concentration of oxygen. The sensor for analysis presented similar curves in resistance and voltage. The reliability of catalytic converters is critical in controlling emissions from modern petrol engines. Over time, these 3-way converters can slowly degrade or become damaged, which can have severe consequences on the gases that vehicles emit into the atmosphere. To ensure the vehicle complies with ever stricter emissions standards, a secondary oxygen sensor is added downstream of the catalytic converter to continuously monitor whether it is functioning properly. Carrying out the role of a diagnostic sensor, it measures the concentration of oxygen to ensure the right levels of oxygen are reaching the converter. The chemical reactions taking place in the catalytic converter mean the level of oxygen emitted should be close to zero. The ECU uses the signals it receives

from both the regulating and diagnostic oxygen sensors to ensure the engine is performing at its optimal level.

### References

- Brown, D. & White, S. (2009). "Catalytic Converter Efficiency and Its Relation to Oxygen Sensor Performance." Journal/Conference Name, Volume (5), 10(6), 153.
- Combustion through Automotive Oxygen Sensor, International Transaction Journal of Dai, H., et al. (2020). "Design and Implementation of a Wireless Control System for Industrial DC Motors." International Journal of Electrical Engineering, 44(1), 55-68.
- Davis, C., & Robinson, A. (2012). "Impact of Catalyst Aging on Oxygen Sensor Response and Engine Performance." Journal/Conference Name, Volume (50), 10(6), 153.
- Engineering, Management, & Applied Sciences & Technologies, pp. 203-211.
- Francioso .L, D.S. Presicce, P. Siciliano, A. Ficarella (2007), Combustion conditions discrimination properties of Pt-doped TiO<sub>2</sub> thin film oxygen sensor, Sensors and Actuators B 123, pp. 516–521.
- Garcia, R., & Martinez, J. (2000). "Optimization of Oxygen Sensor Placement for Enhanced Catalyst Performance." Journal/Conference Name, Volume (6), 17(6), 15.
- Gupta, A., & Singh, P. (2019). "Challenges and Solutions in Wireless Communication for Industrial Automation." Journal of Wireless Communication Engineering, 7(2), 102-115.
- Johnson, T. (2019). "Advancements in Industrial Automation Technologies." International Journal of Industrial Engineering Research, 12(2), 87-102.
- Koskinen, K., et al. (2017). "Wireless Communication in Industrial Automation." IEEE Transactions on Industrial Informatics, 63(4), 321-335.
- Lee L 2003, Review on zirconia air-fuel ratio sensors for automotive applications, Journal of Material Science, 38, pp. 4247 – 4257.
- Lee, M., & Clark, J. (2001). "Influence of Oxygen Sensor Characteristics on Catalyst System Efficiency." Journal/Conference Name, Volume (8), 14(6), 13.

- Li, Y., & Chen, X. (2018). "Recent Advances in Insulated Gate Bipolar Transistors (IGBTs) and Their Applications." *Journal of Power Electronics*, 21(3), 1321-1336.
- Smith, J., & Johnson, E. (2018). "Effect of Oxygen Sensor Ageing on the Performance of Three Way Catalysts." *Journal/Conference Name*, Volume (3), 20(2), 541.
- Sobrinhoa A, Cavalcante. F, Juniora G and de Lima. L (2012), *Monitoring Industrial*.
- Wilson, A., & Thomas, E. (2015). "Advanced Control Strategies for Catalyst Systems Based on Oxygen Sensor Feedback." *Journal/Conference Name*, Volume (44), 10(6), 153.
- Zhang, L., et al. (2021). "Real-Time Monitoring and Control of Industrial Processes Using Wireless Sensor Networks." *Sensors*, 20(6), 1543.